

## no\_dnssec-v6-UDP\_client\_edns\_fallback

IPv4


IPv6

Dual-Stack

IPv4

IPv6

Dual-Stack

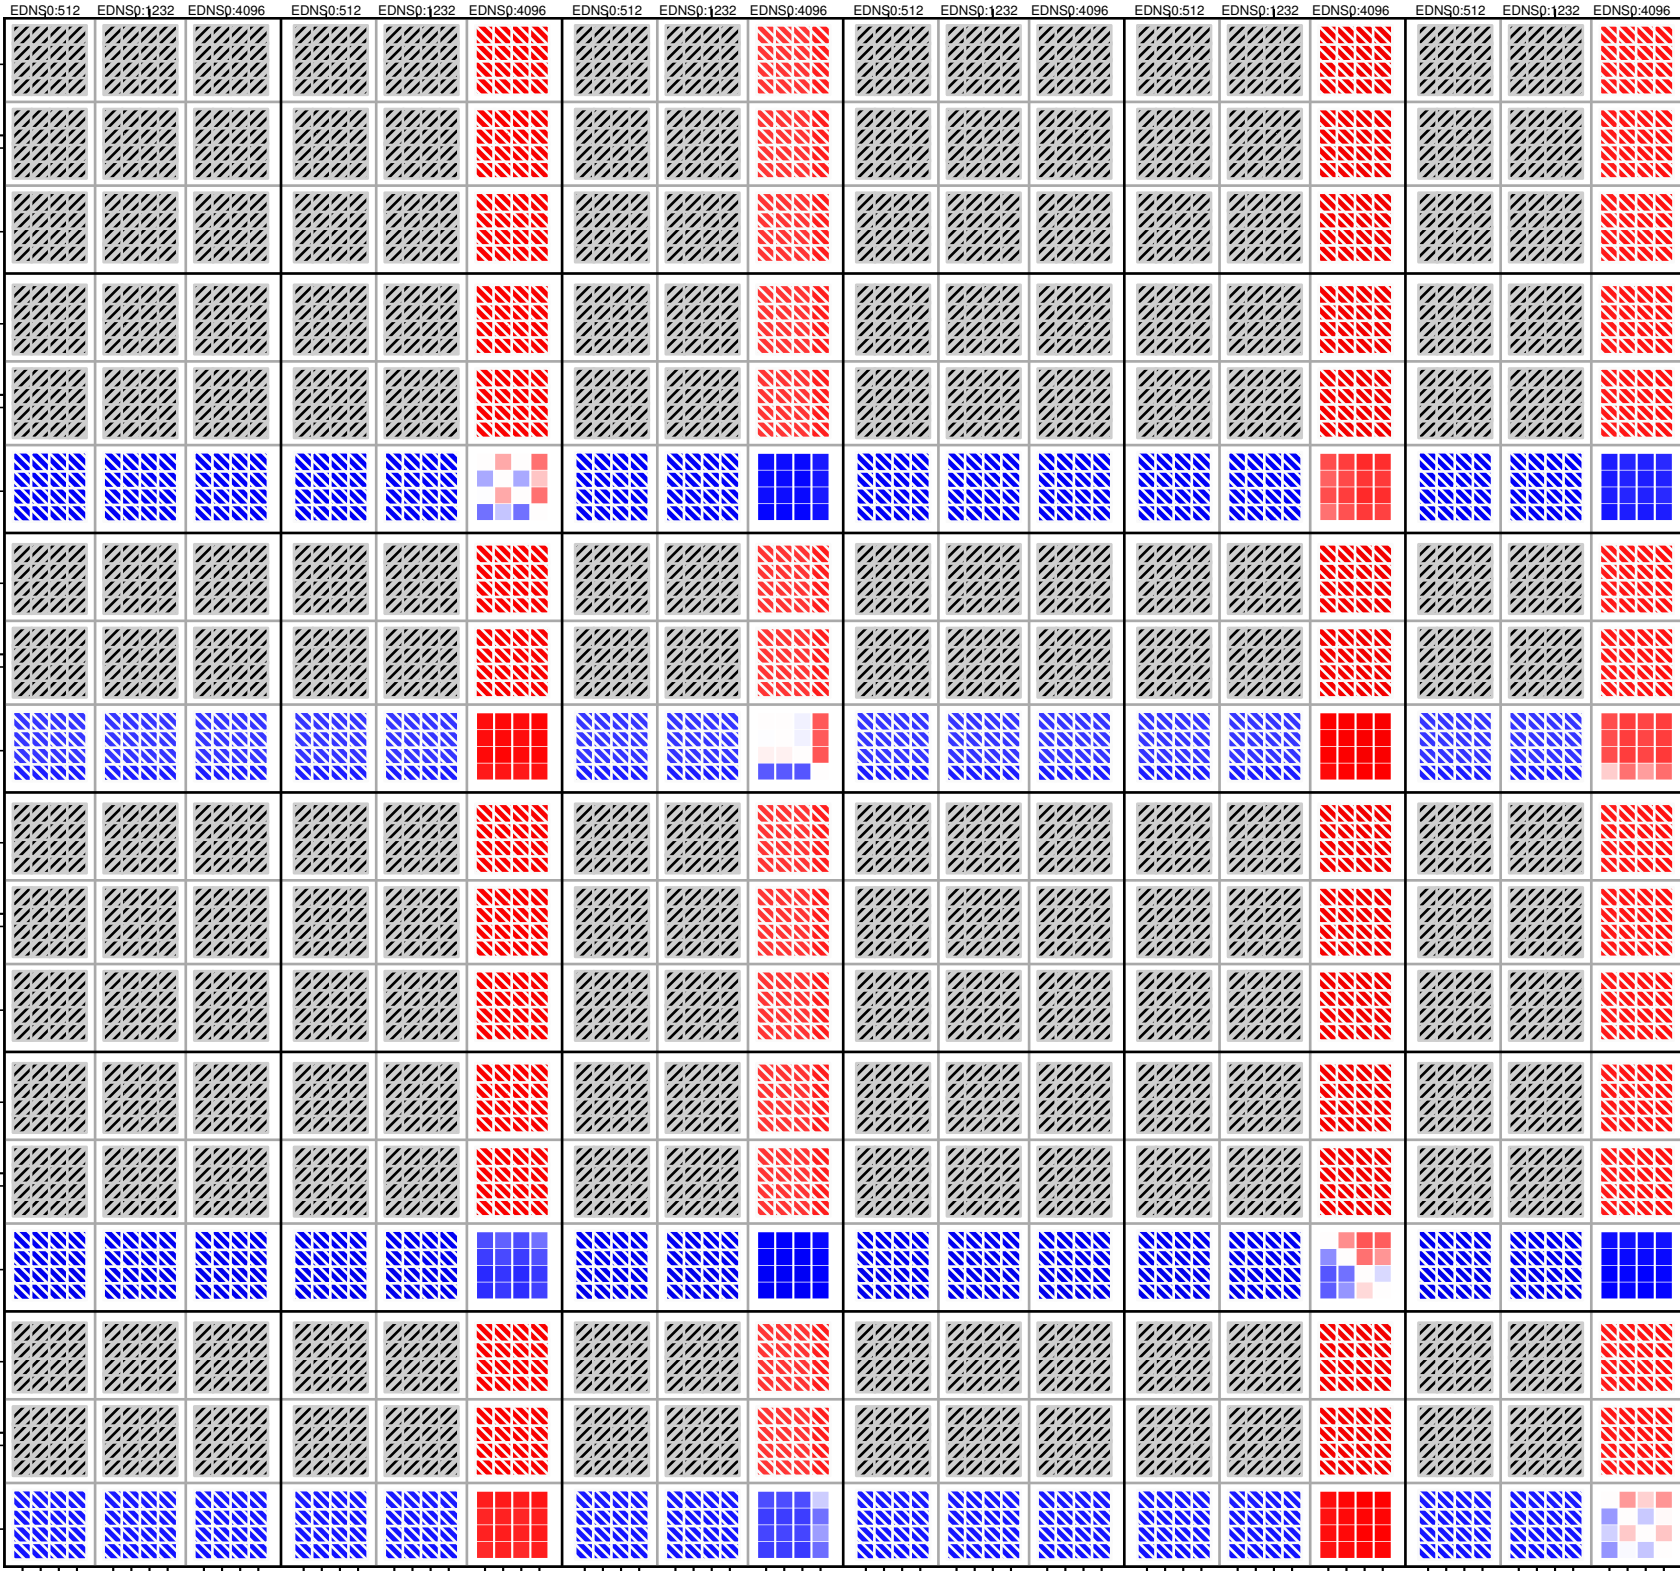

1500  
1280 (PMTUD)  
1280 (no PMTUD)  
Path 1280 (no PMTUD)

1500  
1280 (PMTUD)  
1280 (no PMTUD)  
Path 1280 (no PMTUD)

1500  
1280 (PMTUD)  
1280 (no PMTUD)  
Path 1280 (no PMTUD)

1500  
1280 (PMTUD)  
1280 (no PMTUD)  
Path 1280 (no PMTUD)

1500  
1280 (PMTUD)  
1280 (no PMTUD)  
Path 1280 (no PMTUD)

1500  
1280 (PMTUD)  
1280 (no PMTUD)  
Path 1280 (no PMTUD)

1500  
1280 (PMTUD)  
1280 (no PMTUD)  
Path 1280 (no PMTUD)

1500  
1280 (PMTUD)  
1280 (no PMTUD)  
Path 1280 (no PMTUD)

1500, LGI  
1280 (PMTUD), LGI  
1280 (no PMTUD), LGI  
Path 1280 (no PMTUD), LGI

1500, LGI  
1280 (PMTUD), LGI  
1280 (no PMTUD), LGI  
Path 1280 (no PMTUD), LGI

1500, LGI  
1280 (PMTUD), LGI  
1280 (no PMTUD), LGI  
Path 1280 (no PMTUD), LGI

1500, LGI  
1280 (PMTUD), LGI  
1280 (no PMTUD), LGI  
Path 1280 (no PMTUD), LGI

1500, LGI  
1280 (PMTUD), LGI  
1280 (no PMTUD), LGI  
Path 1280 (no PMTUD), LGI

1500, LGI  
1280 (PMTUD), LGI  
1280 (no PMTUD), LGI  
Path 1280 (no PMTUD), LGI

1500, LGI  
1280 (PMTUD), LGI  
1280 (no PMTUD), LGI  
Path 1280 (no PMTUD), LGI

1500, LGI  
1280 (PMTUD), LGI  
1280 (no PMTUD), LGI  
Path 1280 (no PMTUD), LGI

1500, LGI  
1280 (PMTUD), LGI  
1280 (no PMTUD), LGI  
Path 1280 (no PMTUD), LGI

100 ;  $X > Y$

50

10

5

1

0.5

0.1

0 ;  $X = Y$

-0.1

-0.5

-1

-5

-10

-50

-100 ;  $X < Y$

$$f(V) = \log(|\%nssets(X) - \%nssets(Y)|)$$